




A CSW Industrials Company

R Series

Single Component Stair Nosings

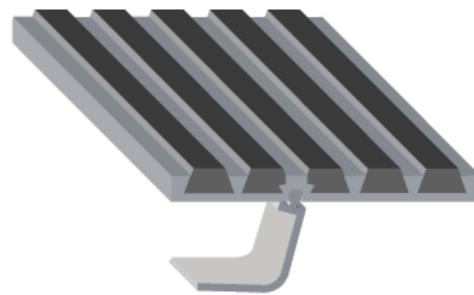

PRODUCT DESCRIPTION

Single component stair nosing that installs set back from the leading edge of the stair, consisting of extruded aluminum and two-part epoxy abrasive.

IDEAL FOR

- New stair treads where enhanced slip resistance is required.

PERFORMANCE

Static coefficient of friction:

- Dry: 1.17 per ASTM D2047-11
- Wet: 1.13 per ASTM D2047-11

MATERIALS

- Aluminum extrusions: 6063-T5, ASTM B221
- Two-part epoxy and aluminum oxide abrasive
- Fasteners provided for installation included

ADVANTAGES

- Proprietary epoxy abrasive formula is tough and wear resistant

LIMITATIONS

- Provided in 10'-0" (3048mm) lengths


FINISH

- Mill finish aluminum
- Abrasive available in a variety of colors

OPTIONS

- Available in multiple widths
- Available in multiple profiles
- Cast-in or blockout installation

AVAILABLE FASTENERS

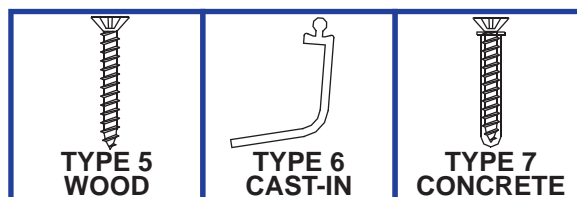

RELATED PRODUCTS

- Two component stair nosings
- Retrofit stair nosings
- Abrasive bar systems

ADDITIONAL DOCUMENTATION

- Product details
- Installation instructions
- Maintenance and cleaning
- Warranty
- SDS documentation
- LEED documentation

WARRANTY

Standard Warranty: 1 year

Optional Warranty: 5 years with Certified Installer

Sample warranty available upon request.

TECHNICAL DATA 05 55 00