



## RS Series

### Retrofit Stair Nosings

#### PRODUCT DESCRIPTION

Retrofit stair nosing consisting of extruded aluminum and two-part epoxy abrasive

#### IDEAL FOR

- Existing stair treads where enhanced slip resistance is required.

#### PERFORMANCE

Static coefficient of friction:

- Dry: 1.17 per ASTM D2047-11
- Wet: 1.13 per ASTM D2047-11

#### MATERIALS

- Aluminum extrusions: 6063-T5, ASTM B221
- Two-part epoxy and aluminum oxide abrasive
- Fasteners provided for installation included

#### ADVANTAGES

- Proprietary epoxy abrasive formula is tough and wear resistant

#### LIMITATIONS

- Provided in 10'-0" (3048mm) lengths


#### FINISH

- Mill finish aluminum
- Abrasive available in a variety of colors

#### OPTIONS

- Available in multiple widths
- Available with 80° or 90° downlegs to fit most stair profiles

#### AVAILABLE FASTENERS

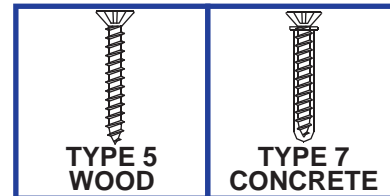

#### RELATED PRODUCTS

- Single component stair nosings
- Two component stair nosings
- Abrasive bar systems

#### ADDITIONAL DOCUMENTATION

- Product details
- Installation instructions
- Maintenance and cleaning
- Warranty
- SDS documentation
- LEED documentation

#### WARRANTY

Standard Warranty: 1 year

Optional Warranty: 5 years with Certified Installer

*Sample warranty available upon request.*